


## EQUIPMENT SPECIFICATIONS

# LCM Recovery Unit

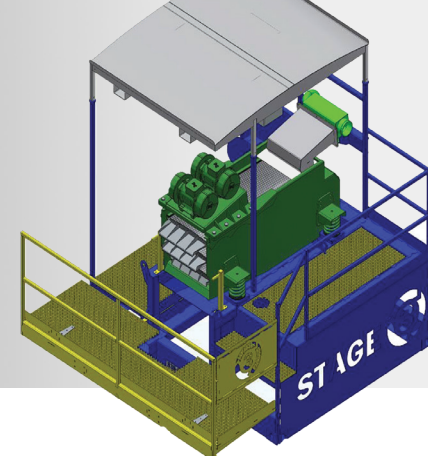

DESCRIPTION	TECHNICAL SPECIFICATIONS	ELECTRICAL REQUIREMENTS
<ul style="list-style-type: none"><li>&gt; Triple or Quadruple unit set up</li><li>&gt; Independent VFD controlled pumps</li><li>&gt; Recovers LCM, Beads and other particle specific material</li><li>&gt; Series and Parallel operations<ul style="list-style-type: none"><li>- Flowrate dependent options</li></ul></li><li>&gt; Bladder/air tensioned screens for safe and easy removal</li></ul>	<ul style="list-style-type: none"><li>&gt; Flowrate: 20 – 150 gal/min/unit</li><li>&gt; G-Force: 4 – 5 G's/unit</li><li>&gt; Weight: 8,300 lbs/unit</li><li>&gt; Riser Skid Dimensions: 20' (L) x 8' (W) x 8' (H)<ul style="list-style-type: none"><li>- Used for screen and tool storage</li><li>- Allows for effluent, gravity flow of up to 10'</li></ul></li></ul>	<ul style="list-style-type: none"><li>&gt; Flowrate: 20 – 150 gal/min/unit</li><li>&gt; G-Force: 4 – 5 G's/unit</li><li>&gt; Weight: 8,300 lbs/unit</li></ul>